


MF 3" Down Light Specification

Model NO.:MF-300F098

Cut out:

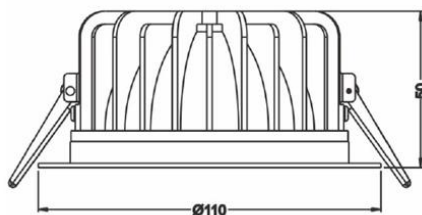

Fixed COB Series

UGR:19 KN<10% CRI>8:



IEC62031
IEC60598-1
IEC60598-2
IEC61347
Comply with Energy Star SSL

ErP CE



EPISTAR

LIFUD




Product Parameters:

Input voltage	220-240Vac, 50hz/60hz
Product Size	D109*52mm
Cut out Size	Φ 98mm
Power(watt)	7W/ 9W
Color temperature	3000K / 4000K / 6000K
LED Chip	Samsung/ Epistar
LED Driver	Lifud (IP44) / Meanwell (IP65)
PF	≥0.95
Housing Colour	White RAL9003
Luminous Flux (lm)	7W: 545lm@3000K, 600lm@4000K, 700lm@5000K 9W: 765lm@3000K, 800lm@4000K, 900lm@5000K
CRI (Ra)	>83
Lifespan	≥50000hrs
Beam Angle	80°
Material	Aluminum
Operating Temperature	-20°C ~50°C
Dimmable	Y
IP	IP44/IP65
Certificate	CE/ RoHS
Warranty Period	3 years

Package:




Packing Size: (CM)




16(D1)*16 (F1)*9cm(H1)/PCS

N.W: 0.55KG, G.W: 0.64KG

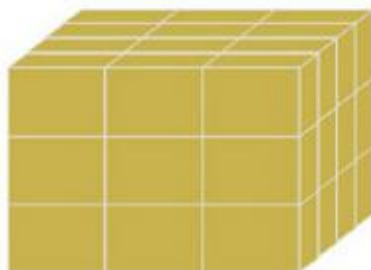

24PCS/CTN

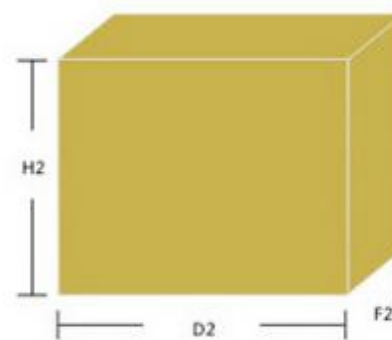

56(D2)*36(F2)*40cm(H2)/24PCS

N.W: 14.6KG, G.W: 16.7KG

Job reference photos from Ming Feng

